由 Autodesk 教育版产品制作

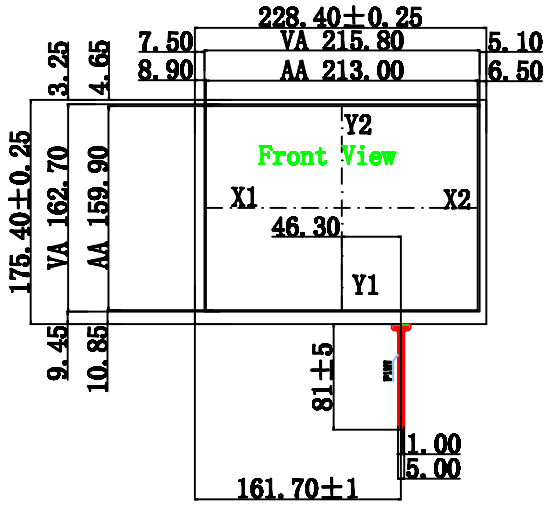





| PIN | PIN1 | PIN2 | PIN3 | PIN4 |
|---|---|---|---|---|
| OUT | X1 | Y1 | X2 | Y2 |




DETAIL-B

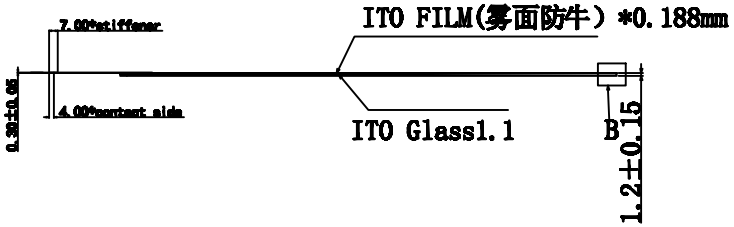


Instruction:
1. Type:Film to Glass
2. Operating Voltage: 3~7 V
3. Response Time:≤10ms
4. Storage Temperature: -20℃~+70℃
5. Operation Temperature/Humidity : -10℃~+60℃/ 20%~95%
6. Hitting Life:>10,000,000 Times ,250gf Force;
7. writting Life>1,000,000 Times 250gf Force;
8. Connect Material:FPC+PIN
9. Film Thickness:0.188mm
10. Glass Thickness:1.1mm
11. Light transmission: ≥78%
12. Force:100g or less
13. Linearity:≤1.5%
14. Insulation:≥20M Ω
15. Surface Hardness ≥3H(pencil)
16. 未标注公差为±0.3mm

| | | | |
|---|---|---|---|
| MODEL NO. | TS104A4B012 | UNIT: | MM |
| DRAWN: | | TOLERANCE: | ±0.3 |
| DATE: | 17/12/12 | SCALE: | 1:1 |
| VERSION: | 1.0 | REV: | |

由 Autodesk 教育版产品制作