



| E | F | G |
|----------|------------------------|------------------------|
| 标记(mark) | 修改内容(revised contents) | 签名(signature) 日期(Date) |
| 1 | | |
| | | |
| | | |




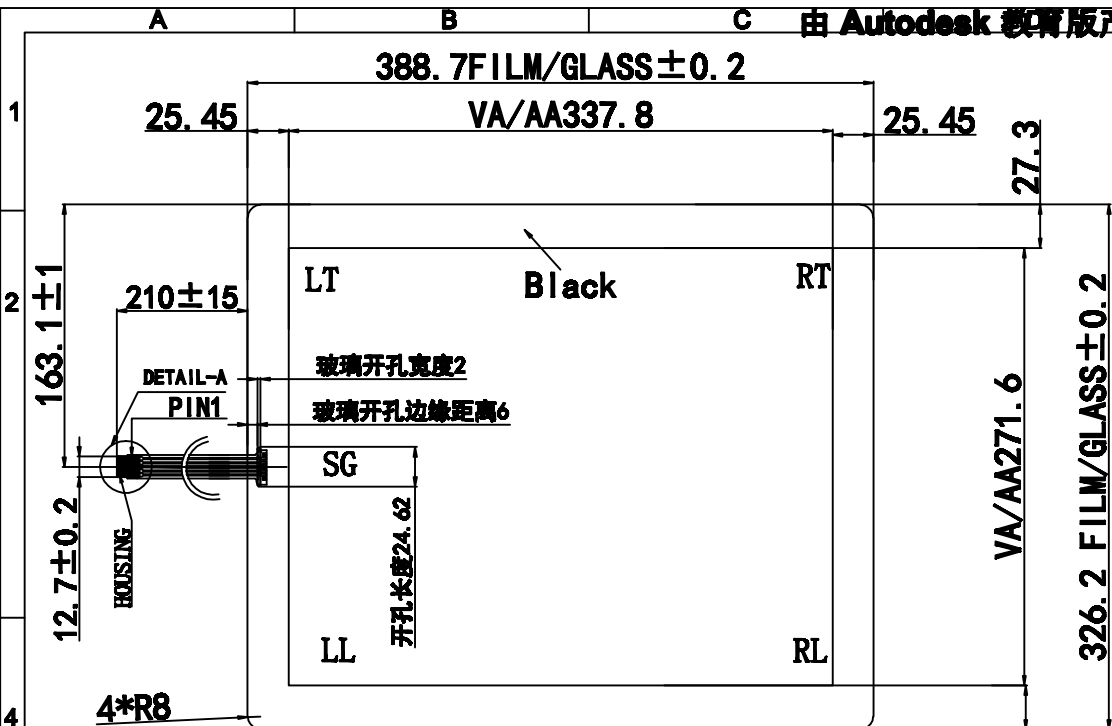


Contact Side:

| CONNECTOR PINOUT | |
|------------------|-------------|
| PIN NO. | DESIGNATION |
| 1 | RT |
| 2 | LT |
| 3 | SG |
| 4 | LL |
| 5 | RL |

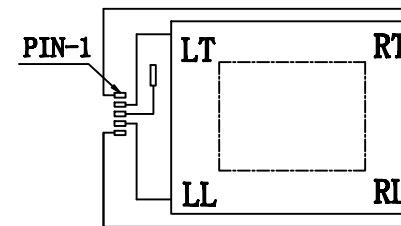

DETAIL-B

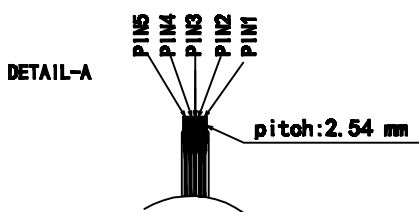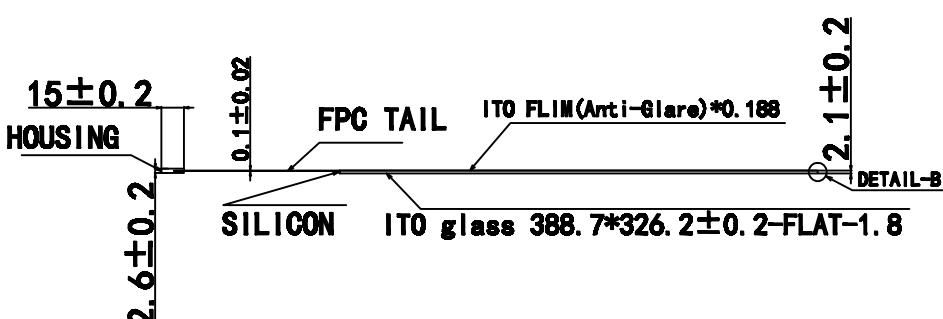

Instruction:

1. Type: Film to Glass
2. Operating Voltage: 3~7V
3. Response Time: ≤15ms
4. Storage Temperature: -20℃~+50℃/20%~80%
5. Operation Temperature/Humidity: -10℃~+50℃/20%~80%
6. Hitting Life: >10,000,00 Times. 100gf Force
7. Writting Life: >1,000,00 Times. 100gf Force
8. Connect Material: FPC

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light Transmission: ≥78%
12. Force: 100g or less
13. Linearity: ≤2.5%
14. Insulation: ≥20MΩ
15. Surface Hardness: ≥3H(pencil)
16. Unmarked tolerance as ±0.2

| | | | |
|--------------------|---------------------|---------------|--------------|
| TITLE: 产品编号 | Customerid: 客户编号 | View: 投影方式 | |
| Designed By: 设计 | Unit: 单位 | mm | |
| Checked By: 审核 | Date: 日期 | 20170327 | Scale: 比例 |
| Approved By: 批准 | | | 1:1 |