由 Autodesk 教育版产品制作

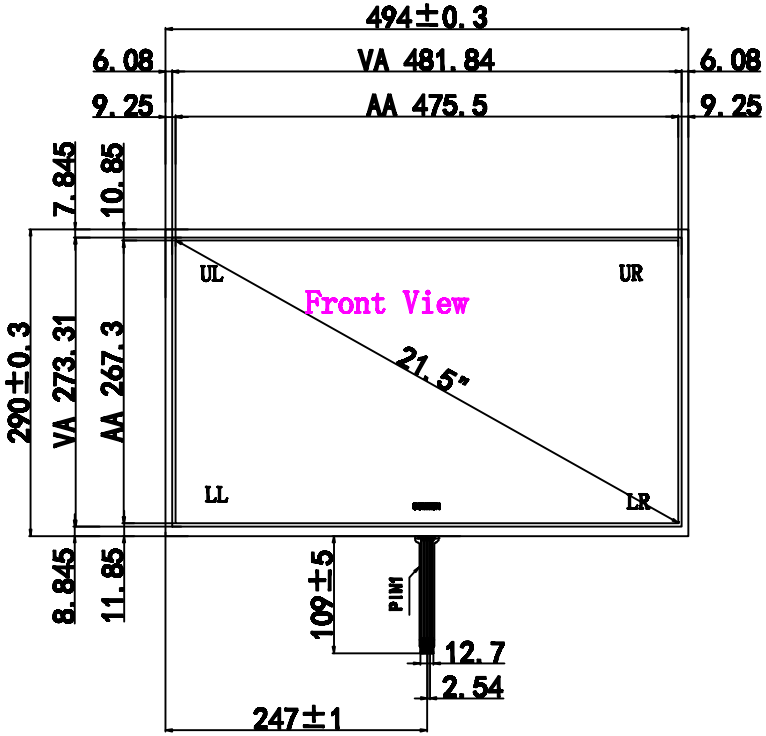

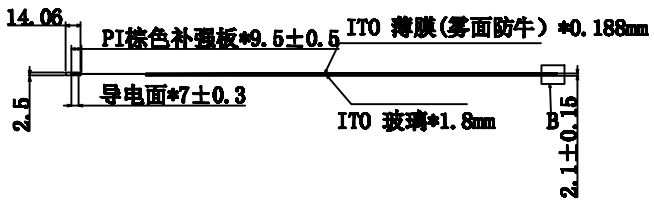

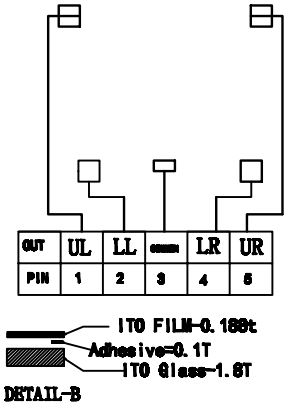

Instruction:
1. Type:Film to Glass
2. Operating Voltage: 3~7 V
3. Response Time:≤10ms
4. Storage Temperature: -20 ℃~+70 ℃
5. Operation Temperature/Humidity : -10 ℃~+60 ℃/ 20%~80%
6. Hitting Life:>10,000,000 Times ,200gf Force;
7. writting Life>1,000,000 Times 200gf Force;
8. Connect Material:FPC+PIN
9. Film Thickness:0.188mm
10. Glass Thickness:1.8mm
11. Light transmission: ≥75%
12. Force:100g or less
13. Linearity:≤ 5 %
14. Insulation: ≥20M Ω
15. Surface Hardness ≥3H(pencil)
16. 未限注公差为±0.3mm

MODEL NO.	TS215A5K01	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:	16/10/07	SCALE:	1:1
VERSION:	1.0	REV:	

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作